



EXCELLENT QUALITY INNOVATION

PROFESSIONAL PNEUMATIC TOOLS



www.koyaxtools.com



We (Koyax India Pvt. Ltd.) are a professionally organized company based at Delhi. We are an ISO 9001:2015 certified company. Over 16 years experience & knowledge of international industrial systems, dedicated to provide the best economical solutions to our valued customers. We introduce ourselves as a manufacturing, marketing, trading and importing entire range of pneumatic tools, spares, accessories and services. A team of highly qualified and experience engineers are placed at strategic location to render "Just in Time" value add service to our clients be it pneumatic tooling solutions.

CONTENTS

IMPACT WRENCH 3/8"	1	BELT SANDER	10
IMPACT WRENCH 1/2"	2	HIGH SPEED SANDER	10
IMPACT WRENCH 3/4"	2	POLISHER	11
IMPACT WRENCH 1"	3	HAMMER	11
SCREW DRIVER	3	CHIPPING HAMMER	11
PISTOL SCREW DRIVER	4	WELD FLEX	11
SHUT OFF SCREW DRIVER	4 - 5	SAND RAMMER	11
DRILL & TAPPER	6	RIVETER	11
RATCHET WRENCH	6	RIVNUT	12
RATCHET WRENCH (NARRO SPACE)	7 - 8	AIR BODY SAW	12
DIE & MICRO DIE GRINDER	8 - 9	ENGRAVING PEN	12
ANGLE GRINDER	9	ACCESSORIES	12
SANDER	10	ACCESSORIES (BITS)	13

INDUSTRIAL IMPACT WRENCH 3/8"



KT-1011

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 11000
MAX TORQUE: 135 NM (100 FT-LB)
BOLT CAPACITY : 8-10 MM
OVERALL LENGTH : 160 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2 LBS (0.9 KGS)



KT-1012

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 10000
MAX TORQUE: 160 NM (118 FT-LB)
BOLT CAPACITY : 6-8 MM
OVERALL LENGTH : 195 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.75 LBS (1.25 KGS)



KT-1013

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 8100
MAX TORQUE: 200 NM (148 FT-LB)
BOLT CAPACITY : 13 MM
OVERALL LENGTH : 220 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.5 LBS (0.7 KGS)



KT-1014

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 10000
MAX TORQUE: 244NM (180 FT-LB)
BOLT CAPACITY : 13 MM
OVERALL LENGTH : 166 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.9 LBS (1.3 KGS)



KT-1015

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 7500
MAX TORQUE: 434 NM (320 FT-LB)
BOLT CAPACITY : 12-14 MM
OVERALL LENGTH : 122 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.9 LBS (1.3 KGS)



KT-1016

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 10000
MAX TORQUE: 140 NM (103 FT-LB)
BOLT CAPACITY : 6-8 MM
OVERALL LENGTH : 220 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.08 LBS (1.4 KGS)



KT-1017

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 11000
MAX TORQUE: 475NM (350 FT-LB)
BOLT CAPACITY : 6-12 MM
OVERALL LENGTH : 126 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.09 LBS (1.4 KGS)



KT-1018

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 9000
MAX TORQUE: 180 NM (133 FT-LB)
BOLT CAPACITY : 10-12 MM
OVERALL LENGTH : 170 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.19 LBS (1.45 KGS)



KT-1019

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 9000
MAX TORQUE : 160 NM (118 FT-LB)
BOLT CAPACITY : 8-10 MM
OVERALL LENGTH : 170 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.34 LBS (1.52 KGS)



KT-1020

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 11000
MAX TORQUE : 135 NM (100 FT-LB)
BOLT CAPACITY : 8-10 MM
OVERALL LENGTH : 160 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2 LBS (0.9 KGS)



KT-1021

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 11000
MAX TORQUE : 135 NM (100 FT-LB)
BOLT CAPACITY : 8-10 MM
OVERALL LENGTH : 160 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2 LBS (0.9 KGS)



KT-1022

SQUARE DRIVE : 3/8"
FREE SPEED (R.P.M.) : 11000
MAX TORQUE : 135 NM (100 FT-LB)
BOLT CAPACITY : 8-10 MM
OVERALL LENGTH : 160 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2 LBS (0.9 KGS)

INDUSTRIAL IMPACT WRENCH 1/2"



KT-1111

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 8100
MAX TORQUE: 200 NM (148 FT-LB)
BOLT CAPACITY : 12-14 MM
OVERALL LENGTH : 220 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.5 LBS (0.7 KGS)



KT-1112

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 7000
MAX TORQUE: 760NM (560 FT-LB)
BOLT CAPACITY : 16-18 MM
OVERALL LENGTH : 180 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 5.94 LBS (2.7 KGS)



KT-1113

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 8500
MAX TORQUE: 480 NM(354 FT-LB)
BOLT CAPACITY : 14 MM
OVERALL LENGTH : 155 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.3 LBS (1.5 KGS)



KT-1114

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 11000
MAX TORQUE:678 NM(500 FT-LB)
BOLT CAPACITY : 13 MM
OVERALL LENGTH : 124 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.86 LBS (1.3 KGS)



KT-1115

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 9000
MAX TORQUE: 610 NM (450 FT-LB)
BOLT CAPACITY : 12-14 MM
OVERALL LENGTH : 122 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.9 LBS (1.3 KGS)



KT-1116

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 10000
MAX TORQUE:1356NM (1000FT-LB)
BOLT CAPACITY : 16-18 MM
OVERALL LENGTH : 193 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 4.41 LBS (2 KGS)



KT-1117

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 10000
MAX TORQUE: 610 NM (450 FT-LB)
BOLT CAPACITY : 14-16 MM
OVERALL LENGTH : 260 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.08 LBS (1.4 KGS)



KT-1118

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 7500
MAX TORQUE:1050NM (774FT-LB)
BOLT CAPACITY : 12-14 MM
OVERALL LENGTH : 193 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 4.85 LBS (2.2 KGS)



KT-1119

SQUARE DRIVE : 1/2"
FREE SPEED (R.P.M.) : 7500
MAX TORQUE:1320NM (974FT-LB)
BOLT CAPACITY : 16 MM
OVERALL LENGTH : 193 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 4.85 LBS (2.2 KGS)

INDUSTRIAL IMPACT WRENCH 3/4"



KT-1210

SQUARE DRIVE : 3/4"
FREE SPEED (R.P.M.) : 5100
MAX TORQUE:1500NM(1100 FT-LB)
BOLT CAPACITY : 16-30 MM
OVERALL LENGTH : 230 MM
AIR INLET : 3/8" PT
AIR HOSE : 1/2" I.D.
NET WEIGHT : 10.8 LBS (4.9 KGS)



KT-1211

SQUARE DRIVE : 3/4"
FREE SPEED (R.P.M.) : 4700
MAX TORQUE:1450NM(1070 FT-LB)
BOLT CAPACITY : 14-30 MM
OVERALL LENGTH : 210 MM
AIR INLET : 3/8" PT
AIR HOSE : 1/2" I.D.
NET WEIGHT : 9.26 LBS (4.2 KGS)



KT-1212

SQUARE DRIVE : 3/4"
FREE SPEED (R.P.M.) : 7500
MAX TORQUE:1050NM
BOLT CAPACITY : 16-30 MM
OVERALL LENGTH : 230 MM
AIR INLET : 3/8" PT
AIR HOSE : 1/2" I.D.
NET WEIGHT : 2.2 KGS



KT-1213

SQUARE DRIVE : 3/4"
FREE SPEED (R.P.M.) : 4600
MAX TORQUE:1600NM(1180 FT-LB)
BOLT CAPACITY : 16-30 MM
OVERALL LENGTH : 240 MM
AIR INLET : 3/8" PT
AIR HOSE : 1/2" I.D.
NET WEIGHT : 7.94 LBS (3.6 KGS)

INDUSTRIAL IMPACT WRENCH 1"



KT-1301

SQUARE DRIVE : 1"
FREE SPEED (R.P.M.) : 4000
MAX TORQUE : 3200 NM (2358 FT-LB)
BOLT CAPACITY : 42 MM
OVERALL LENGTH : 340 MM
AIR INLET : 1/2" PT
AIR HOSE : 1/2" I.D.
NET WEIGHT : 26.4 LBS (12 KGS)



KT-1302

SQUARE DRIVE : 1"
FREE SPEED (R.P.M.) : 4000
MAX TORQUE : 2900 NM (2137 FT-LB)
BOLT CAPACITY : 48 MM
OVERALL LENGTH : 520 MM
AIR INLET : 1/2" PT
AIR HOSE : 1/2" I.D.
NET WEIGHT : 28.6 LBS (13 KGS)



KT-1303

SQUARE DRIVE : 1"
FREE SPEED (R.P.M.) : 3500
MAX TORQUE : 4500 NM (3317 FT-LB)
BOLT CAPACITY : 55 MM
OVERALL LENGTH : 625 MM
AIR INLET : 1/2" PT
AIR HOSE : 1/2" I.D.
NET WEIGHT : 30.8 LBS (14 KGS)

INDUSTRIAL SCREW DRIVER



KT-1401S

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 10000
MAX TORQUE : 35 NM (30 FT-LB)
BOLT CAPACITY : 4-6 MM
OVERALL LENGTH : 190 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.78 LBS (0.8 KGS)



KT-1402S

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 9500
MAX TORQUE : 130 NM (96 FT-LB)
BOLT CAPACITY : 6-8 MM
OVERALL LENGTH : 195 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.31 LBS (1.05 KGS)



KT-1403S

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 8500
MAX TORQUE : 40 NM (130 FT-LB)
BOLT CAPACITY : 8-12 MM
OVERALL LENGTH : 200 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.43 LBS (1.1 KGS)



KT-1404S

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 7500
MAX TORQUE : 130 NM (96 FT-LB)
BOLT CAPACITY : 6-8 MM
OVERALL LENGTH : 202 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.2 LBS (1 KGS)



KT-1405S

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 1700
MAX TORQUE : 3 NM (2.7 FT-LB)
OVERALL LENGTH : 235 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.3 LBS (0.6 KGS)



KT-1406S

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 1800
MAX TORQUE : 5-13 NM (4.5-11.5 FT-LB)
OVERALL LENGTH : 240 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.4 LBS (1.1 KGS)



KT-1407S

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 800
MAX TORQUE : 5-16 NM (4.5-14.5 FT-LB)
OVERALL LENGTH : 258 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.6 LBS (1.2 KGS)



KT-1408L

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 5000
MAX TORQUE : 46 NM (34 FT-LB)
BOLT CAPACITY : 4-6 MM
OVERALL LENGTH : 260 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.3 LBS (1.5 KGS)



KT-1409L

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.) : 10000
MAX TORQUE : 140 NM (103 FT-LB)
BOLT CAPACITY : 6-8 MM
OVERALL LENGTH : 220 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.08 LBS (1.4 KGS)

INDUSTRIAL PISTOL SCREW DRIVER



KT-1501P

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.): 10000
MAX TORQUE: 35NM(30FT-LB)
BOLT CAPACITY : 4-6 MM
OVERALL LENGTH : 145 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 2.42 LBS(1.1 KGS)



KT-1502P

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.): 9500
MAX TORQUE: 130NM(96FT-LB)
BOLT CAPACITY : 6-8 MM
OVERALL LENGTH : 155 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 2.64 LBS(1.2 KGS)



KT-1503P

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.): 8000
MAX TORQUE: 130NM(96FT-LB)
BOLT CAPACITY : 6-8 MM
OVERALL LENGTH : 155 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 2.64 LBS(1.2 KGS)



KT-1504P

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.): 9000
MAX TORQUE: 160NM(118FT-LB)
BOLT CAPACITY : 8-10 MM
OVERALL LENGTH : 170 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 3.34 LBS(1.52 KGS)



KT-1505P

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.): 9000
MAX TORQUE: 180NM(133FT-LB)
BOLT CAPACITY : 10-12 MM
OVERALL LENGTH : 170 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 3.19 LBS(1.45 KGS)



KT-1506P

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.): 7300
MAX TORQUE: 200 NM (148FT-LB)
BOLT CAPACITY : 10-12 MM
OVERALL LENGTH : 175 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.6 LBS (1.2 KGS)



KT-1507P

SQUARE DRIVE : 1/4"
FREE SPEED (R.P.M.): 7500
MAX TORQUE: 200 NM (148 FT-LB)
BOLT CAPACITY : 10-12 MM
OVERALL LENGTH : 190 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.6 LBS (1.2 KGS)



**STRAIGHT HANDLE
LEVER START SHUT-OFF SCREW DRIVER**



**STRAIGHT HANDLE
PUSH START SHUT-OFF SCREW DRIVER**

PUSH START AUTO SHUT OFF NOISELESS SCREW DRIVER

KOYAX AIR SCREW DRIVER HAS FOLLOWING FEATURES

ACCURACY : KOYAX PROVIDE CLUTCH WITH $\pm 3\%$ DEVIATION OF TORQUE, ASSURE THE BEST QUALITY.

ECONOMIC : WIDE-RANGING TORQUE AND LONGER LIFE CYCLE OF MOTOR.

DELICACY : COMBINATION OF ART, ERGONOMICS AND MECHANICAL DESIGN.

TECHNOLOGY : SPECIAL MECHANICAL STRUCTURE AND MOTOR GIVE YOU LOW NOISE, LOW VIBRATION AND HIGH ACCURACY.

Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Kg/cm ³	Air Consumption	Torque range	Standard deviation	Fastening Capacity	
										Machine Screw Dia	Tapping Screw Dia.
	r.p.m.	gm	mm	mm	±2dBA	mm	m ³ /min	Kgf-cm	%		
T10PB	1000	430	180	29	74	5.00	0.20	0.5-2	±3	M1.0-M2.2	M1.1-M1.7
T30PB	1800	430	180	29	74	6.35	0.28	2-16	±3	M2.2-M4.2	M1.6-M3.2
T35PB	2200	430	180	29	74	6.35	0.28	3-20	±3	M2.4-M4.5	M2.0-M3.5
T40PB	1000	430	180	29	74	6.35	0.28	5-30	±3	M2.8-M5.0	M2.2-M4.0
T45PB	800	430	180	29	74	8.00	0.30	8-40	±3	M3.6-M5.7	M2.7-M4.4
T48PB	1800	770	215	37	78	9.50	0.55	7-50	±3	M2.9-M6.0	M2.6-M4.7
T50PB	1400	770	215	37	78	9.50	0.55	7-55	±3	M2.9-M6.0	M2.6-M4.9
T55PB	1000	770	215	37	78	9.50	0.55	7-65	±3	M2.9-M6.4	M2.6-M5.4
T60PB	550	770	215	37	78	9.50	0.55	15-95	±3	M4.1-M7.0	M3.3-M6.0
T65PB	300	810	215	37	78	9.50	0.55	30-180	±3	M5.0-M9.0	M4.0-M7.0
T68PB	250	1100	215	39	78	10.00	0.60	50-280	±3	M6-M11	M4.9-M8.7

Note : 3/8" Sq. Drive Models available for T60/T65/T68

INDUSTRIAL PISTOL & ANGLE SCREW DRIVER

PISTOL HANDLE TRIGGER START SHUT-OFF AIR SCREW DRIVERS



Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Kg/cm ³	Air Consumption	Torque range	Vibration level	Standard deviation	Fastening Capacity	
	r.p.m.	gm	mm	mm	±2dBA	mm	m ³ /min	Kgf-cm	ms ²	%	Machine Screw Dia.	Tapping Screw Dia.
R41BBP	1000	640	180	33	78	6.35	0.28	5-35	<2.5	±3	M2.8-M5.2	M2.2-M4.2
R50BBP	1400	980	215	39	78	9.50	0.55	10-60	<2.5	±3	M3.6-M6.3	M2.8-M5.0
R55BBP	1000	980	215	39	78	9.50	0.55	12-75	<2.5	±3	M3.8-M6.6	M3.0-M5.4
R60BBP	550	980	215	39	78	9.50	0.55	30-110	<2.5	±3	M5.0-M7.8	M4.0-M6.2
R65BBP	300	1100	215	39	78	9.50	0.55	30-180	<2.5	±3	M5.0-M9.5	M4.4-M7.5
R68BBP	250	1100	215	39	78	10.00	0.60	50-280	<2.5	±3	M6.0-M11.0	M4.9-M8.7

ANGLE TYPE LEVER START SHUT-OFF AIR SCREW DRIVERS



Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Kg/cm ³	Air Consumption	Torque range	Vibration level	Standard deviation	Fastening Capacity	
	r.p.m.	gm	mm	mm	±2dBA	mm	m ³ /min	Kgf-cm	ms ²	%	Machine Screw Dia.	Tapping Screw Dia.
T40AB	1000	710	280	32	78	9.50	0.55	5-35	<2.5	±3	M2.5-M5.0	M2.2-M4.0
T50AB	1400	1100	335	37	78	9.50	0.55	7-50	<2.5	±3	M2.9-M6.0	M2.6-M4.9
T55AB	1000	1100	335	37	78	9.50	0.55	7-65	<2.5	±3	M2.9-M6.4	M2.6-M5.4
T60AB	550	1100	335	37	78	9.50	0.55	15-95	<2.5	±3	M4.1-M7.0	M3.3-M6.0
T65AB	300	1100	335	37	78	9.50	0.55	30-180	<2.5	±3	M5.1-M9.0	M4.4-M7.0

Note : 3/8" Sq. Drive Models available

INDUSTRIAL DRILL & TAPPER



KT-1601S

CHUCK SIZE : 10 MM
FREE SPEED (R.P.M.) : 1800
OVERALL LENGTH : 216 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2 LBS (0.9 KGS)



KT-1602L

CHUCK SIZE : 10 MM
FREE SPEED (R.P.M.) : 1800
OVERALL LENGTH : 216 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.43 LBS (1.1 KGS)



KT-1603P

CHUCK SIZE : 10 MM
FREE SPEED (R.P.M.) : 1800
OVERALL LENGTH : 165 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2 LBS (0.9 KGS)



KT-1604P

CHUCK SIZE : 13 MM
FREE SPEED (R.P.M.) : 800
OVERALL LENGTH : 113 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.87 LBS (1.3 KGS)



KT-1605PT

CHUCK SIZE : 10 MM
FREE SPEED (R.P.M.) : 1500
OVERALL LENGTH : 156 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2 LBS (0.9 KGS)



KT-1606PT

CHUCK SIZE : 13 MM
FREE SPEED (R.P.M.) : 700
OVERALL LENGTH : 205 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.57 LBS (1.62 KGS)

INDUSTRIAL RATCHET WRENCH



KT-1701

SQUARE DRIVE (QC) : 1/4" OR 3/8"
FREE SPEED (R.P.M.) : 240
MAX TORQUE: 41-50NM (27-31 FT-LB)
BOLT CAPACITY : 6 MM
OVERALL LENGTH : 170 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.32 LBS (0.6 KGS)



KT-1702

SQUARE DRIVE (QC) : 1/2" OR 3/8"
FREE SPEED (R.P.M.) : 160
MAX TORQUE : 88 NM (65 FT-LB)
BOLT CAPACITY : 10 MM
OVERALL LENGTH : 254 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.57 LBS (1.17 KGS)



KT-1703

SQUARE DRIVE (QC) : 1/2" OR 3/8"
FREE SPEED (R.P.M.) : 160
MAX TORQUE : 115 NM (85 FT-LB)
BOLT CAPACITY : 10 MM
OVERALL LENGTH : 256 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.75 LBS (1.25 KGS)



KT-1704

SQUARE DRIVE (QC) : 1/2" OR 3/8"
FREE SPEED (R.P.M.) : 280
MAX TORQUE : 108 NM (80 FT-LB)
BOLT CAPACITY : 12 MM
OVERALL LENGTH : 277 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.6 LBS (1.2 KGS)

INDUSTRIAL RATCHET WRENCH (NARROW SPACE)



KT-1705NS



KT-1706NS



KT-1707NS



KT-1708NS



KT-1709NS



KT-1710NS



KT-1711NS


REAR EXHAUST

- THE RATCHET WRENCH CAN BE USED IN NARROW WORKING SPACES AND CAN FASTEN BOLTS AND NUTS EASILY. THIS SPACIAL TOOL CAN BE REACHED TIGHT CPLACE THAT OTHER AIR TOOLS CAN NOT.
- REMOVE: FIRST, LOOSEN NUT BY WRENCH THEN TAKE NUT OUT WITH AIR RATCHET.

Technical Specification (air pressure at 90 psi \ 6.2 bar \ 6.3 kg/cm²)

Model	Hex Size	Working Torque		Max. Torque		Free Speed	Air Consumption		Overall Length		Air Inlet	Net Weight		Sound Level
	mm	Nm	ft-lb	Nm	ft-lb	rpm	l/min	cfm	mm	inch	P.T	Kg	lb	dB(A)
KT-1705NS	6, 7, 8, 10, 11, 12, (1/4", 3/8")	10	7	10	7	180	127	4.5	300	11.81	1/4	1.30	2.87	86
KT-1706NS	10, 11, 12, 13, 14, (1/2", 9/16")	15	11	25	18	220	212	7.5	332	13.07	1/4	1.92	4.23	87
KT-1707NS	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, (11/16")	15	11	25	18	190	212	7.5	338	13.30	1/4	2.00	4.40	87
KT-1708NS	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, (11/16")	80	59	90	66	150	353	12.5	390	15.35	1/4	2.42	5.33	92
KT-1709NS	21, 22, 23, 24, 26, 27	80	59	90	66	130	353	12.5	398	15.66	1/4	2.48	5.46	92
KT-1710NS	29, 30, 32	80	59	90	66	110	353	12.5	405	15.94	1/4	2.50	5.51	92
KT-1711NS	36	80	59	90	66	100	353	12.5	408	16.06	1/4	2.52	5.55	92

INDUSTRIAL RATCHET WRENCH (NARROW SPACE)

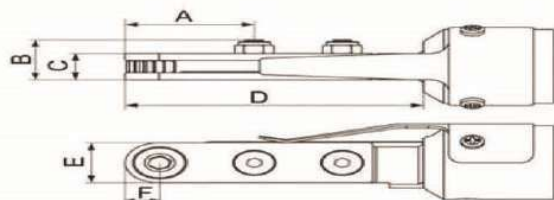

Model	A	B	C	D	E	F
	mm	mm	mm	mm	mm	mm
KT-1705NS	38.2	20	13.2	88.2	20	10.2
KT-1706NS	44.4	26	18	109	25.2	12.2
KT-1707NS	51	26	18	115	33.2	16.6
KT-1708NS	51	26	18	115	33.2	16.6
KT-1709NS	59	26	18	123	41	20.5
KT-1710NS	66	26	18	130	48	24
KT-1711NS			18			

Ratchet Wrench Order Code Reference

Model	KT-1705NS	KT-1706NS	KT-1707NS	KT-1708NS	KT-1709NS	KT-1710NS	KT-1711NS
Hex Size	Order Code						
6 mm	KT-1705NS-6						
7 mm	KT-1705NS-7						
8 mm	KT-1705NS-8						
9 mm	KT-1705NS-9						
10 mm	KT-1705NS-10	KT-1706NS-10	KT-1707NS-10	KT-1708NS-10			
11 mm	KT-1705NS-11	KT-1706NS-11	KT-1707NS-11	KT-1708NS-11			
12 mm	KT-1705NS-12	KT-1706NS-12	KT-1707NS-12	KT-1708NS-12			
13 mm		KT-1706NS-13	KT-1707NS-13	KT-1708NS-13			
14 mm		KT-1706NS-14	KT-1707NS-14	KT-1708NS-14			
15 mm			KT-1707NS-15	KT-1708NS-15			
16 mm			KT-1707NS-16	KT-1708NS-16			
17 mm			KT-1707NS-17	KT-1708NS-17			
18 mm			KT-1707NS-18	KT-1708NS-18			
19 mm			KT-1707NS-19	KT-1708NS-19			
21 mm					KT-1709NS-21		
22 mm					KT-1709NS-22		
23 mm					KT-1709NS-23		
24 mm					KT-1709NS-24		
26 mm					KT-1709NS-26		
27 mm					KT-1709NS-27		
29 mm						KT-1710NS-29	
30 mm						KT-1710NS-30	
32 mm						KT-1710NS-32	
36 mm							KT-1711NS-36
1/4"	KT-1705NS-1/4						
3/8"	KT-1705NS-3/8						
1/2"		KT-1706NS-1/2					
9/16"		KT-1706NS-9/16					
11/16"			KT-1707NS-11/16	KT-1708NS-11/16			

INDUSTRIAL DIE & MICRO DIE GRINDER



KT-1801

COLLET : 3, 2.38 MM
FREE SPEED (R.P.M.) : 70000
OVERALL LENGTH : 150 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.35 LBS (0.16 KGS)



KT-1802

COLLET : 3 MM
FREE SPEED (R.P.M.) : 65000
OVERALL LENGTH : 130 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.66 LBS (0.3 KGS)



KT-1803

COLLET : 6 MM
FREE SPEED (R.P.M.) : 22000
OVERALL LENGTH : 175 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.3 LBS (0.6 KGS)



KT-1804

COLLET : 6 MM
FREE SPEED (R.P.M.) : 35000
OVERALL LENGTH : 124 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.99 LBS (0.45 KGS)

INDUSTRIAL DIE & MICRO DIE GRINDER



KT-1805

COLLET : 6 MM
FREE SPEED (R.P.M.): 20000
OVERALL LENGTH: 150 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.45 KGS



KT-1806T

COLLET : 6 MM
FREE SPEED (R.P.M.): 32000
OVERALL LENGTH: 180 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.73 KGS



KT-1807

COLLET : 6 MM
FREE SPEED (R.P.M.): 24000
OVERALL LENGTH: 180 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.7 KGS



KT-1808

COLLET : 3 MM
FREE SPEED (R.P.M.): 32000
OVERALL LENGTH: 158 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.3 KGS



KT-1809

COLLET : 6 MM
FREE SPEED (R.P.M.): 21000
OVERALL LENGTH: 317 MM
AIR INLET : 3/8" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.5 KGS

INDUSTRIAL ANGLE GRINDER



KT-1901

BLADE DIA : 2"
FREE SPEED (R.P.M.) : 15000
ANGLE (DEGREE) : 90
OVERALL LENGTH : 135 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.54 LBS (0.7 KGS)



KT-1902

BLADE DIA : 2"
FREE SPEED (R.P.M.) : 15000
ANGLE (DEGREE) : 90
OVERALL LENGTH : 140 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.80 LBS (0.82 KGS)



KT-1903

BLADE DIA : 4"
FREE SPEED (R.P.M.) : 12000
ANGLE (DEGREE) : 90
OVERALL LENGTH : 228 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.88 LBS (1.76 KGS)



KT-1904

BLADE DIA : 5"
FREE SPEED (R.P.M.) : 12000
ANGLE (DEGREE) : 90
OVERALL LENGTH : 228 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.97 LBS (1.8 KGS)



KT-1905

BLADE DIA : 4"
FREE SPEED (R.P.M.) : 10000
ANGLE (DEGREE) : 90
OVERALL LENGTH : 245 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 5.51 LBS (2.5 KGS)



KT-1906

BLADE DIA : 5"
FREE SPEED (R.P.M.) : 10000
ANGLE (DEGREE) : 90
OVERALL LENGTH : 245 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 5.73 LBS (2.6 KGS)



KT-1907

BLADE DIA : 7"
FREE SPEED (R.P.M.) : 7000
ANGLE (DEGREE) : 90
OVERALL LENGTH : 343 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.45 LBS (3.2 KGS)

INDUSTRIAL SANDER



KT-2001

PAD : 3" & 3.5"
FREE SPEED (R.P.M.) : 12000
OVERALL LENGTH : MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.2 LBS (1 KGS)



KT-2002

PAD : 5" & 6"
FREE SPEED (R.P.M.) : 12000
OVERALL LENGTH : MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.98 LBS (0.9 KGS)



KT-2003

PAD : 5" & 6"
FREE SPEED (R.P.M.) : 12000
OVERALL LENGTH : MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.2 LBS (1 KGS)



KT-2004

PAD : 5" & 6"
FREE SPEED (R.P.M.) : 11000
OVERALL LENGTH : MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.98 LBS (0.9 KGS)



KT-2005

PAD : 5" & 6"
FREE SPEED (R.P.M.) : 12000
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 1.54 LBS (0.7 KGS)



KT-2006

PAD : 5" & 6"
FREE SPEED (R.P.M.) : 12000
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 1.76 LBS (0.8 KGS)



KT-2007

PAD : 5" & 6"
FREE SPEED (R.P.M.) : 12000
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 1.76 LBS (0.8 KGS)



KT-2008

PAD : 5" & 6"
FREE SPEED (R.P.M.) : 12000
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 1.76 LBS (0.8 KGS)



KT-2009

PAD : 3"
FREE SPEED (R.P.M.) : 17000
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 1.78 LBS (0.81 KGS)

INDUSTRIAL BELT SANDER & HIGH SPEED SANDER



KT-2101

BELT : 10 X 330 MM
FREE SPEED (R.P.M.) : 20000
OVERALL LENGTH : 320 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 1.76 LBS (0.8 KGS)



KT-2102

BELT : 20 X 520 MM
FREE SPEED (R.P.M.) : 18000
OVERALL LENGTH : 430 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 3.08 LBS (1.4 KGS)



KT-2201

PAD : 3"
FREE SPEED (R.P.M.) : 17000
OVERALL LENGTH : 165 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 1.67 LBS (0.76 KGS)



KT-2202

PAD : 5"
FREE SPEED (R.P.M.) : 16000
OVERALL LENGTH : 150 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 2 LBS (0.9 KGS)



KT-2203

PAD : 3", 4.5", 5"
FREE SPEED (R.P.M.) : 16000
OVERALL LENGTH : 160 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 2.6 LBS (1.2 KGS)

INDUSTRIAL POLISHER & HAMMER



KT-2301

PAD : 3"
FREE SPEED (R.P.M.) : 3000
OVERALL LENGTH : 165 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.63 LBS (0.74 KGS)



KT-2302

PAD : 3"
FREE SPEED (R.P.M.) : 3200
OVERALL LENGTH : 160 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.98 LBS (0.9 KGS)



KT-2303

PAD : 3"
FREE SPEED (R.P.M.) : 2500
OVERALL LENGTH : 206 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.43 LBS (0.65 KGS)



KT-2401

SHANK SIZE : 10.2 MM
BLOW PER MIN (B.P.M.) : 5500
OVERALL LENGTH : 215 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.77 LBS (0.35 KGS)



KT-2402

SHANK SIZE : 10.2 MM
BLOW PER MIN (B.P.M.) : 3000
OVERALL LENGTH : 178 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.53 LBS (1.6 KGS)

INDUSTRIAL CHIPPING HAMMER & WELD FLEX & SAND RAMMER



KT-2501

SHANK SIZE : 14.7 MM
BLOW PER MIN (B.P.M.) : 1950
OVERALL LENGTH : 380 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 14.33 LBS (6.5 KGS)



KT-2502

SHANK SIZE : 17.3 MM
BLOW PER MIN (B.P.M.) : 2400
OVERALL LENGTH : 327 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 13 LBS (5.9 KGS)



KT-2601

SHANK SIZE : 10.2 MM
BLOW PER MIN (B.P.M.) : 4200
OVERALL LENGTH : 257 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 4.41 LBS (2 KGS)



KT-2602

SHANK SIZE : 10.2 MM
BLOW PER MIN (B.P.M.) : 6500
OVERALL LENGTH : 330 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.53 LBS (1.6 KGS)



KT-2701

SHANK SIZE :
BLOW PER MIN (B.P.M.) : 800
OVERALL LENGTH : 460 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 9.26 LBS (4.2 KGS)

INDUSTRIAL RIVETER



KT-2801

RIVET CAP. (ALUM.): 2.1-4.8 MM
(IRON) : 2.4-4.8 MM
(SS) :
STOCK LENGTH : 16 MM
TRACTION POWER:1870 LBS(848 KGS)
OVERALL LENGTH : 170X272 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.95 LBS (1.79 KGS)



KT-2802

RIVET CAP. (ALUM.): 2.1-4.8 MM
(IRON) : 2.4-4.8 MM
(SS) :
STOCK LENGTH : 18 MM
TRACTION POWER:1800 LBS(816 KGS)
OVERALL LENGTH : 254 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.1 LBS (1.4 KGS)



KT-2803

RIVET CAP. (ALUM.): 2.1-4.8 MM
(IRON) : 2.4-4.8 MM
(SS) :
STOCK LENGTH : 19 MM
TRACTION POWER : 980-1350 KGS
OVERALL LENGTH : 177X254 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.34 LBS (1.06 KGS)



KT-2804

RIVET CAP. (ALUM.): 2.1-4.8 MM
(IRON) : 2.4-4.8 MM
(SS) : 2.4-4.8 MM
STOCK LENGTH : 19 MM
TRACTION POWER : 890-1180 KGS
OVERALL LENGTH : 288X254 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.93 LBS (1.33 KGS)



KT-2805

RIVET CAP. (ALUM.): 4.0-6.4 MM
(IRON) : 4.0-6.4 MM
(SS) : 4.0-6.4 MM
STOCK LENGTH : 20 MM
TRACTION POWER:940-1850 KGS
OVERALL LENGTH:270X360 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT: 3.48 LBS(1.58 KGS)

INDUSTRIAL RIVNUT



KT-2901

CAP. (CLUTCH TYPE) : M3-M6
FREE SPEED (R.P.M.) : 2700
OVERALL LENGTH : 230 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.87 LBS (1.3 KGS)



KT-2902

CAP. (CLUTCH TYPE) : M6-M10
FREE SPEED (R.P.M.) : 700
OVERALL LENGTH : 200 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 2.65 LBS (1.2 KGS)



KT-2903

CAP. (CLUTCH TYPE) : M10-M12
FREE SPEED (R.P.M.) : 450
OVERALL LENGTH : 210 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 3.97 LBS (1.8 KGS)



KT-2904

CAP. (CLUTCH TYPE) : M3-M12
FREE SPEED (R.P.M.) : 2000
OVERALL LENGTH : 280 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 4.85 LBS (2.2 KGS)

INDUSTRIAL AIR BODY SAW & ENGRAVING PEN



KT-3001

CUTTING CAP. ALUM. : 2.5 MM
CUTTING CAP. IRON : 1.6 MM
STROKES/MINUTE (B.P.M.) : 10000
OVERALL LENGTH : 230 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.37 LBS (0.62 KGS)



KT-3002

CUTTING CAP. ALUM. : 3 MM
CUTTING CAP. IRON : 1.6 MM
STROKES/MINUTE (B.P.M.) : 9000
OVERALL LENGTH : 260 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 1.65 LBS (0.75 KGS)



KT-3101

DIAMETER : 16 MM
BLOWS/MINUTES (B.P.M.) : 3800
OVERALL LENGTH : 169 MM
AIR INLET : 1/4" PT
AIR HOSE : 3/8" I.D.
NET WEIGHT : 0.42 LBS (0.19 KGS)

INDUSTRIAL ACCESSORIES

- ▶ AIR GUN
- ▶ BALANCER
- ▶ BITS
- ▶ FRL
- ▶ FRL OIL
- ▶ QRC COUPLER
- ▶ SANDING PAD
- ▶ WOOL PAD



1/4" HEX SHANK (INSERT TYPE SCREW BITS)

SLOTTED



TIP X LENGTH (MM)

3 X 25
4 X 25
5 X 25
6 X 25

PHILLIPS



TIP X LENGTH (MM)

PH1 X 25
PH2 X 25
PH3 X 25

TORX



TIP X LENGTH (MM)

T6 / T8 X 25
T10 / T15 X 25
T20 / T25 X 25
T30 / T40 X 25

ALLEN



TIP X LENGTH (MM)

2 / 2.5 X 25
3 / 4 X 25
5 X 25
6 X 25

1/4" HEX SHANK (DOUBLE ENDED BITS & NUT RUNNER)

PHILLIPS



TIP X LENGTH (MM)

PH1 X 50 / 75 / 100 / 150
PH2 X 50 / 75 / 100 / 150
PH2 X 200 / 250 / 300
PH3 X 50 / 75 / 100 / 150

NUT RUNNER



A/F X LENGTH (MM)

NUT RUNNER NON MAGNETIC



A/F X LENGTH (MM)

5 X 65
5.5 X 65 / 100
6 X 65
7 X 65 / 100
8 X 65 / 100 / 150
10 X 65 / 100 / 150
11 X 65 / 100
12 X 65 / 100
13 X 65 / 100
14 X 65 / 100

NUT RUNNER MAGNETIC



A/F X LENGTH (MM)

5 X 65
5.5 X 65
6 X 65
7 X 65
8 X 65
10 X 65
11 X 65
1/4" X 65
3/8" X 65

1/4" HEX SHANK (SINGLE ENDED BITS)

SLOTTED



TIP X LENGTH (MM)

3 X 50 / 75 / 100
4 X 50 / 75 / 100
5 X 50 / 75 / 100
6 X 50 / 75 / 100
8 X 50 / 75
10 X 75

PHILLIPS



TIP X LENGTH (MM)

PH00 X 50
PH0 X 50 / 100
PH1 X 50 / 75 / 100 / 150
PH2 X 50 / 75 / 100 / 150
PH3 X 50 / 75 / 100 / 150
PH4 X 50

TORX



TIP X LENGTH (MM)

T5 / T6 / T7 X 50
T8 / T10 X 50 / 75 / 100 / 150
T15 / T20 X 50 / 75 / 100 / 150
T25 / T30 X 50 / 75 / 100 / 150
T35 / T40 X 50 / 75 / 100 / 150
T45 X 50 / 75

ALLEN



TIP X LENGTH (MM)

2 X 50
2.5 X 50 / 100
3 X 50 / 65 / 100
4 X 50 / 65 / 100
5 X 50 / 65 / 100
6 X 50 / 65 / 100
8 / 10 X 70

